





Page 1 of 7 Pages

No.: RZUN2022-2779-DT1

检测报告 TEST REPORT

1.2m 跌落 1.2m Drop Test

NAME OF SAMPLE: Package for Rechargeable Li-ion Cell			
产品名称:	可充锂离子电芯的包装件		
CLIENT:	Zhengzhou BAK Battery Co.,Ltd		
委托单位: 郑州比克电池有限公司			
CLASSIFICATION OF TEST:	Commission Test		
检测类别:	委托测试		

威凯检测技术有限公司 CVC Testing Technology Co., Ltd.

检测报告

TEST REPORT

No.: RZUN2022-2779-DT1 Page 2 of 7 Pages Name of samples: Package for Rechargeable Li-ion Battery type/Model: 电池型号规格: N18650CH 样品名称: 可充锂离子电芯的包装件 3,6V 2600mAh 9,36Wh Commissioner address:300 Meters of North Road, West Conjunction of Zhongxing Road and BAK Road, Zhongmou County, Zhengzhou City, Henan, P. R. Commissioned by: Zhengzhou BAK Battery Co.,Ltd China. 委托单位: 郑州比克电池有限公司 委托单位地址:中国河南省郑州市中牟县中兴路与比克大 道交叉口向西 300 米路北 Manufacturer address:300 Meters of North Road, West Conjunction of Zhongxing Road and BAK Road, Zhongmou County, Zhengzhou City, Henan, P. R. Manufacturer: Zhengzhou BAK Battery Co.,Ltd 制造商: 郑州比克电池有限公司 制造商地址:中国河南省郑州市中牟县中兴路与比克大 道交叉口向西 300 米路北 Classification of test: Commission Test Quantity of sample: 10 packages 检测类别: 委托测试 样品数量: 10个包装 Tested according to: Sample identification: 测试标准: ST/SG/AC.10/1/Rev.22 样品标识序号: p1#~p10# Receiving date: Means of receiving: Submitted by commissioner 接样日期: 2022-07-18 接样方式:委托单位送样 Completing date: Test item: 1 item 完成日期: 2022-08-04 测试项目: 1项

Test conclusion:

检测结论:

The 1.2m drop test of the packages for Rechargeable Li-ion Cell submitted by Zhengzhou BAK Battery Co.,Ltd is tested according to the 22nd Revised Edition of the Recommendations on the Transport of Dangerous Goods, Model Regulations (ST/SG/AC.10/1/Rev.22).

由郑州比克电池有限公司送检的可充锂离子电芯的包装件 1,2m 跌落测试依据《关于危险货物运输的建议书规章范本》第 22 修订版进行检测。

The test results comply with the relevant requirements of ST/SG/AC.10/1/Rev.22. 试验结果符合《关于危险货物运输的建议书 规章范本》第 22 修订版相关要求。

Seal of CVC CVC 盖章 Date of issue:2022-08-23 签发日期:

Title:Manager批准人职务:经理


Approved by: Huang Kun Reviewed by: Zhang Siyao Tested by: Deng Junzhao

批准: Huengken 审核: Zhang siyan 检测: Deng Janzhao

Description and illustration of the sample: 样品说明及描述: The info of package 包装件信息 Package No. p1#~p5# p6#~p10# 包装件编号 Package quantity 8,857kg 9,23kg 包装件重量 Battery net weight 7,778kg 8,642kg 电池净重 **Battery Number** 180pcs 200pcs 电池个数 Package size 290mm*240mm*200mm 414mm*225mm*90mm 包装件尺寸 Type of transport Lithium ion batteries (Including lithium ion polymer batteries) 包装件适用运输方式 锂离子电池 (包括锂离子聚合物电池) 外包装材料 the material of outer packaging ■ Corrugated carton 硬板纸箱 wood carton 木板箱 □其他 other: 能完全装入样品的内包装方式 the manner of inner packaging that can be completely enclose the samples □泡沫材料 Foam material □吸塑盘 Plastic disc ■纸板隔板 Paper divider ■塑料气泡与珍珠棉 Plastic bubble and pearl cotton ■単一封口塑料袋 Single sealing plastic bags □塑料气垫 Plastic air cushion □独立小包装 Independent packaging 其他 other: Description of the sampling procedure: 取样程序的说明: Description of the deviation from the standard, if any: 测试结果不符合标准项的说明: / Remarks: 备注: Throughout this report a comma is used as the decimal separator. 本报告中以逗号代替小数点。

Photos of Samples and Labels/样品照片及标识

Cell/电芯 N18650CH 3,6V 2600mAh 9,36Wh

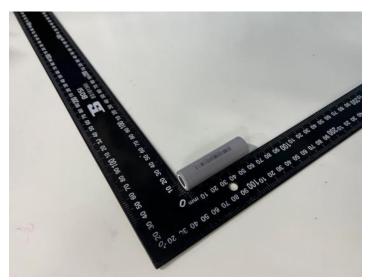





N18650CH BAK A05

Page 5 of 7 Pages Photos of Packages / 包装照片 Package/包装箱 p1#-p5#









ST/SG/AC.10/1/Rev.22					
Clause 章节	Requirements 标准要求		Result 测试结果	Verdict 判定	
6.1.5.3	1.2m Drop test / 1,2 米跌落测试			Р	
	Test procedure / 测试步骤 The package of batteries is dropped from 1.2m / 电池包装件从 1,2 米跌落				
	Drop orientation/跌落方向: Where more than one orientation is possible for a given drop, the orientation most likely to result in failure of the packing must be used. / 如在一次跌落试验中可能有一种以上的方向,须选择最易使包装损坏的跌落方向。 Drop orientation for a package which are in the shape of a box. / 箱状包装的跌落方向: First drop: flat on the bottom / 第一次: 以箱底平跌 Second drop: flat on the top / 第二次: 以箱顶平跌 Third drop: flat on the long side / 第三次: 以一长侧面平跌 Fourth drop: flat on the short side / 第四次: 以一短侧面平跌 Fifth drop: on a corner / 第五次: 以一个角跌落 Drop Target / 跌落目标: The target must be a non-resilient horizontal surface and must be / 跌落目标须为坚硬。无弹性的水平表面目须:		subjected to five drops in different orientation. 此包装为箱状,并经受五个方向的跌落。 The drop target is a concrete floor. 跌落目标为水泥地面。	-	
3.3.1	Requirements/要求			Р	
special provision 188 (g)	Each package is capable of withstanding a 1.2m drop test in any orientation without damage to cells contained therein, without shifting of the contents so as to allow cell to cell contact and without release of contents. 每个包件须能承受任何方向 1,2m 的跌落试验而容器内物品没有破损,没有造成内容物移位,没有出现内装物从内贮器或内容器中漏出。	Sample No. 样品号 Status 跌落后状态	p1#~p10# No damage to cells; No cell to cell contact; No release of contents from the package. 电池无损坏; 无电池 与电池接触; 无内容 物从包装漏出。	Р	

注意事项 Important

1. 报告无检测单位印章无效。

The test report is invalid without the official stamp of CVC.

2. 未经本试验室书面同意,不得部分地复制本报告。

Nobody is allowed to photocopy or partly photocopy this test report without written permission of CVC.

3. 本报告无批准人、审核人及检测人签名无效。

The test report is invalid without the signatures of Ratifier, Reviewer and Testing engineer.

4. 本报告涂改无效。

The test report is invalid if altered,

- 5. 对检测报告若有异议,应于收到报告之日起十五天内向检测单位提出。 Objections to the test report must be submitted to CVC within 15 days,
- 6. 本报告仅对送检样品负责。

The test report is valid for the tested samples only.

7. 判定栏中"-"表示"不需要判定","P"表示"通过","F"表示"不通过", "N/A"表示"不适用"。

As for the Verdict, "-" means "no need for judgement", "P" means "pass", "F" means "fail" and "N/A" means "not applicable".

报告中未加 CMA 标志时,检测数据和结果仅供科研、教学或内部质量控制之用。
The test data and test results given in this test report should only be used for purposes of scientific research, teaching and internal quality control when the CMA symbol is not presented.

地 址: 广东省广州市科学城开泰大道天泰一路3号

广东省广州市黄埔区光谱东路 179 号百事高智慧园 D 栋 (测试地点)

Lab Address: No.3, Tiantai 1st Road, Kaitai Avenue, Science City, Guangzhou, Guangdong, China. Testing Location: Building D, BASIGO INTELLIGENT, No.179, Guangpu East Road, Huangpu District, Guangzhou, P. R. China.

http://www.cvc.org.cn