




THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SEBSON AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SEBSON

RoHS Compliant


REV.	DESCRIPTION	DATE	DESIGN
------	-------------	------	--------

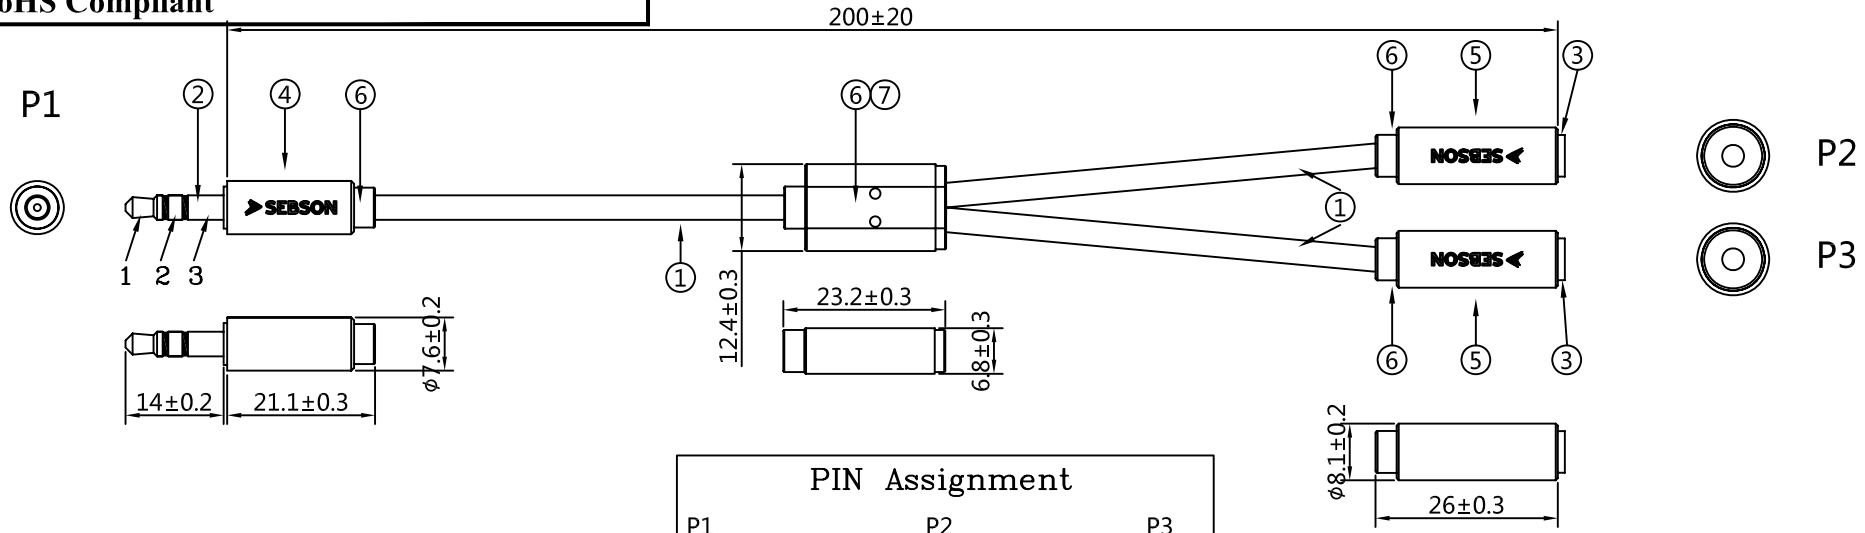

PIN Assignment					
P1		P2		P3	
1	White	1	White	1	
2	Red	2	Red	2	
3	Braid	3	Braid	3	

- NOTES:
- Test Condition:
 - 100% OPEN & SHORT TEST;
 - Insulation Resistance: DC300V ≥5MΩ(Min) ;
 - Conductor Resistance: ≥5Ω/Max.
 - The product is ROHS & REACH compliant.

CLIENT NO:	LENGTH (L)
AUX_1M2F_20CM	200±20mm

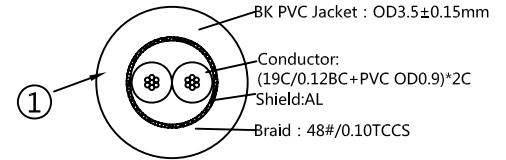

ITEM	DESCRIPTION	UNIT	Q'TY
⑦	Internal MOLDED PE	g	8
⑥	External MOLDED 35P Black PVC	g	12
⑤	SHELL 3.5 Stereo Female Shell,AL Anodize Black,Mark "SEBSON"LOGO	PCS	2
④	SHELL 3.5 Stereo Male Shell,AL Anodize Black,Mark "SEBSON"LOGO	PCS	1
③	CON 3.5 Stereo Female, Gold Plated	PCS	2
②	CON 3.5 Stereo Male, Gold Plated	PCS	1
①	CABLE (19C/0.12BC+PVC OD:0.9mm)*2C(RD,WH)+8mm+48#/0.10TCCS+Black PVC OD:3.5mm L=0.1M	PCS	3

SEBSON SEBSON address: Gernotstrasse 17
44319 Dortmund Germany

ERP NO.:	SAMPLE DWG NO.:		
SKU:	REVISION	A0	
CUSTOMER:	UNIT	mm	
CUSTOMER P/N: AUX_1M2F_20CM	SCALE	NO	
DESCRIPTION JXD-AV1251/G/BK/0.2M	PAGE NO	1/1	
	DATE	2019/07/02	
APPROVAL	CHECKED	DRAWN	