






THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SEBSON AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SEBSON

RoHS Compliant

REV.	DESCRIPTION	DATE	DESIGN
------	-------------	------	--------

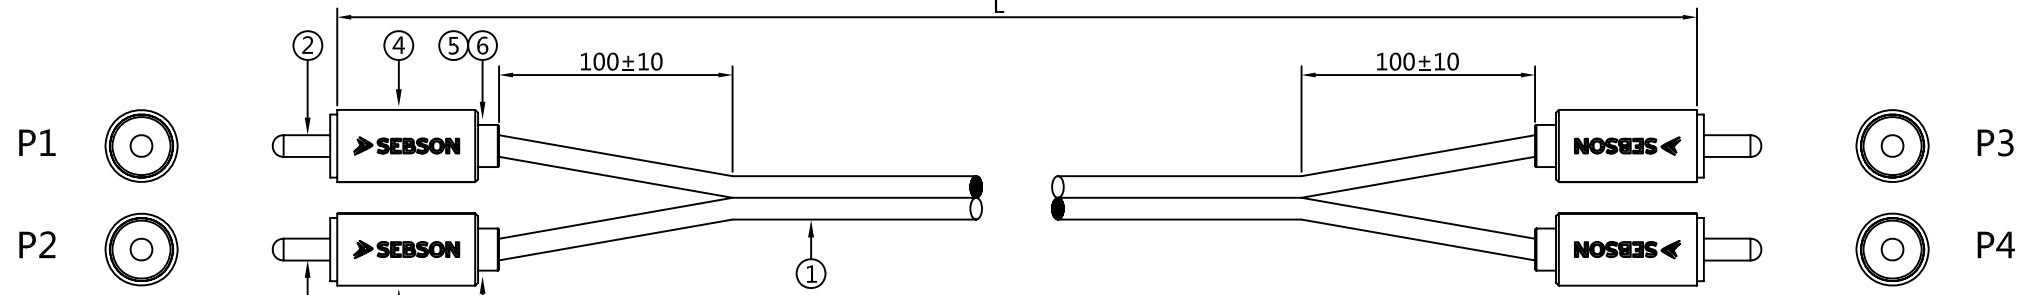

PIN Assignment

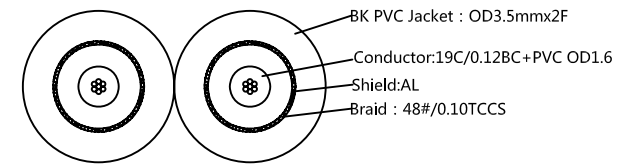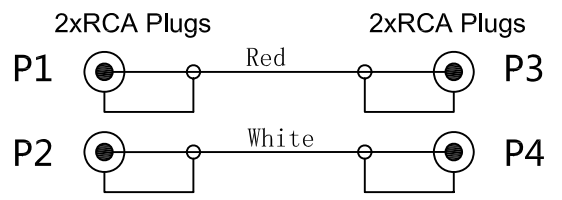

- NOTES:**
- Test Condition:
 - (1) 100% OPEN & SHORT TEST;
 - (2) Insulation Resistance: DC300V ≥5MΩ(Min) ;
 - (3) Conductor Resistance: ≥5Ω/Max.
 - The product is ROHS & REACH compliant.

CLIENT NO:	LENGTH (L)
CINCH_50CM_A	500±20mm
CINCH_1M_A	1000±30mm
CINCH_2M_A	2000±30mm
CINCH_3M_A	3000±50mm
CINCH_5M_A	5000±70mm

ITEM	DESCRIPTION	UNIT	Q'TY
⑦	External MOLDED 35P White PVC (WH-4010)	g	12
⑥	External MOLDED 35P Red PVC (PT1788C)	g	12
⑤	Internal MOLDED PE	g	8
④	SHELL RCA Male Shell,AL Anodize Black,Mark "SEBSON"LOGO	PCS	4
③	CON RCA Male, Gold Plated,White	PCS	2
②	CON RCA Male, Gold Plated,Red	PCS	2
①	CABLE [19C/0.12BC+PVC OD:1.6mm+AL+48#/0.10TCCS +Black PVC OD:3.5MM]*2F(RD,WH)	PCS	1

SEBSON SEBSON address: Gernotstrasse 17
44319 Dortmund Germany

ERP NO.:	SAMPLE DWG NO.:
SKU:	REVISION A0
CUSTOMER:	UNIT mm
CUSTOMER P/N:	SCALE NO
DESCRIPTION JXD-AV1164/G/BK	PAGE NO 1/1
	DATE 2019/07/02
APPROVAL	CHECKED
	DRAWN