



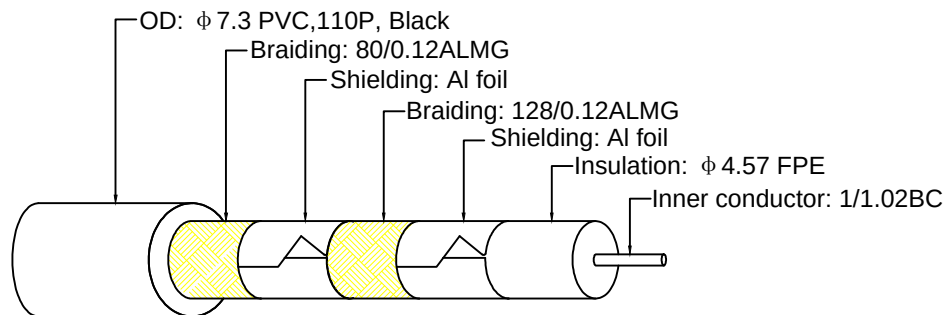

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SEBSON AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SEBSON

RoHS Compliant a

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/08/16	

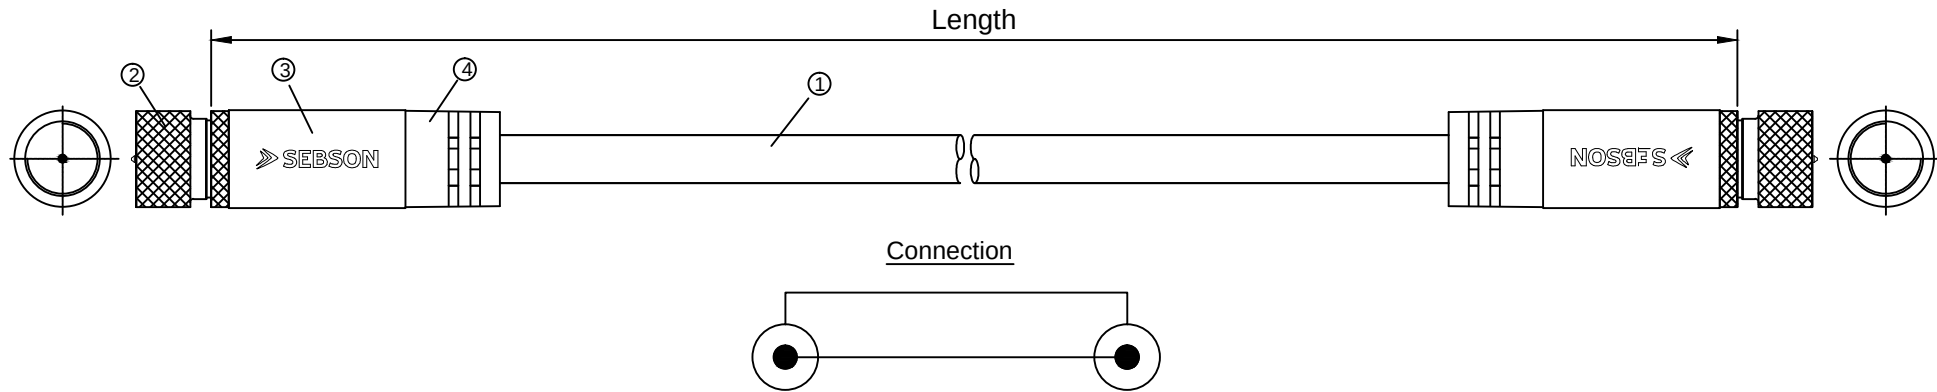


HQ RG6 Coaxial cable

Technical requirements:

- Characteristic impedance: $75 \pm 3 \text{ Ohm} (@200\text{MHz})$
- Reflect:
1006-2400MHz $\geq 18\text{dB}$

Item NO.	Length(m)
SAT_2M_A	2.0m
SAT_5M_A	5.0m
SAT_10M_A	10.0m

④	External Mold	F Male External Mould,Black	2PCS	
③	Shell	F Male Metal shell, Al Shell, Gun Black	2PCS	
②	Connector	F Male, Gold plated	2PCS	
①	Cable	HQ RG6 Quad shielding 105dB Cable 1.02BC+4.57FPE+AL+128/0.12ALMY+AL +80/0.12ALMG+OD:7.3mm Black,110P PVC		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



TOLERANCES UNLESS
OTHERWISE STATED
X. = ± 1
.X = ± 0.2
.XX = ± 0.1



SEBSON address: Gernotstrasse 17
44319 Dortmund Germany

ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	F Male to F Male, SAT cable Gold plated		PAGE NO 1/1
APPROVAL		CHECKED	
		DRAWN	
		DATE	2019/08/16