

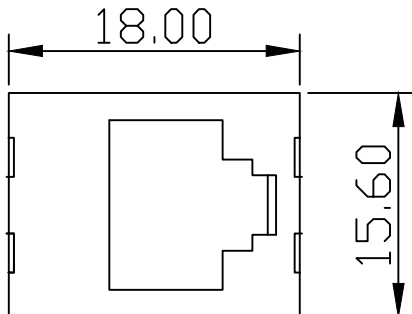


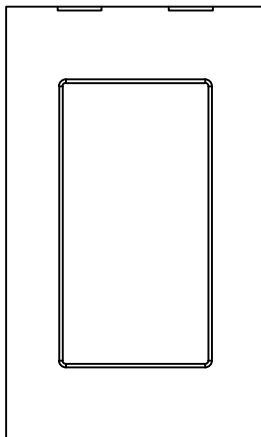

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF **SEBSON** AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF **SEBSON**

RoHS Compliant

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2020/09/17	

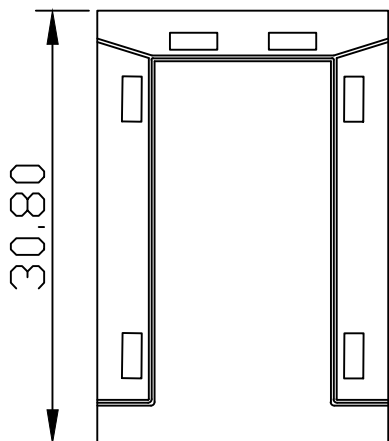

NOTES:

MECHANICAL:

1. Housing & Insert Material: LCP UL94V-0.
2. Contact Material : Phospor bronze T=0.35mm
3. Shield : 0.20-0.25mm Thickness Brass with Tin Plated
4. Operating Life : 750 Cycles Min.
5. PLATING: GOLD PLATING OVER NICKEL

ENVIRONMENTAL:

1. Storage : -40°C ~ +85°C
2. Operation : -40°C ~ +85°C
3. Wave solder temperature: 265°C 5 Sec MAX

	Item NO.	PK
	AD_CAT6_A	1
	2_X_AD_CAT6_A	2
	4_X_AD_CAT6_A	4

SEBSON SEBSON address: Gernotstrasse 17
44319 Dortmund Germany

ERP NO.:		SAMPLE DWG NO:	
		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	CAT6 SFTP RJ45 F to F	PAGE NO	1/1
		DATE	2020/09/17
APPROVAL		CHECKED	
		DRAWN	

①	Adaptor	CAT6 SFTP RJ45 F to F, Iron shell,Nickel plated		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK

TOLERANCES UNLESS OTHERWISE STATED
 X. = ±1
 .X = ±0.2
 .XX = ±0.1