



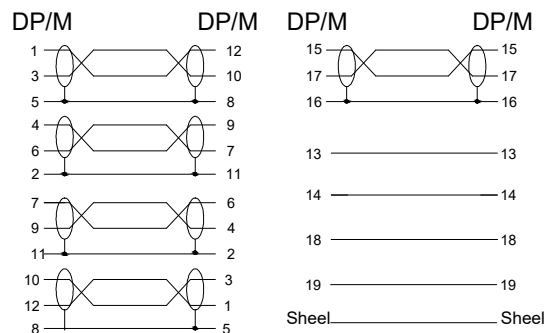

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF **SEBSON** AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF **SEBSON**

RoHS Compliant

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2021/05/21	

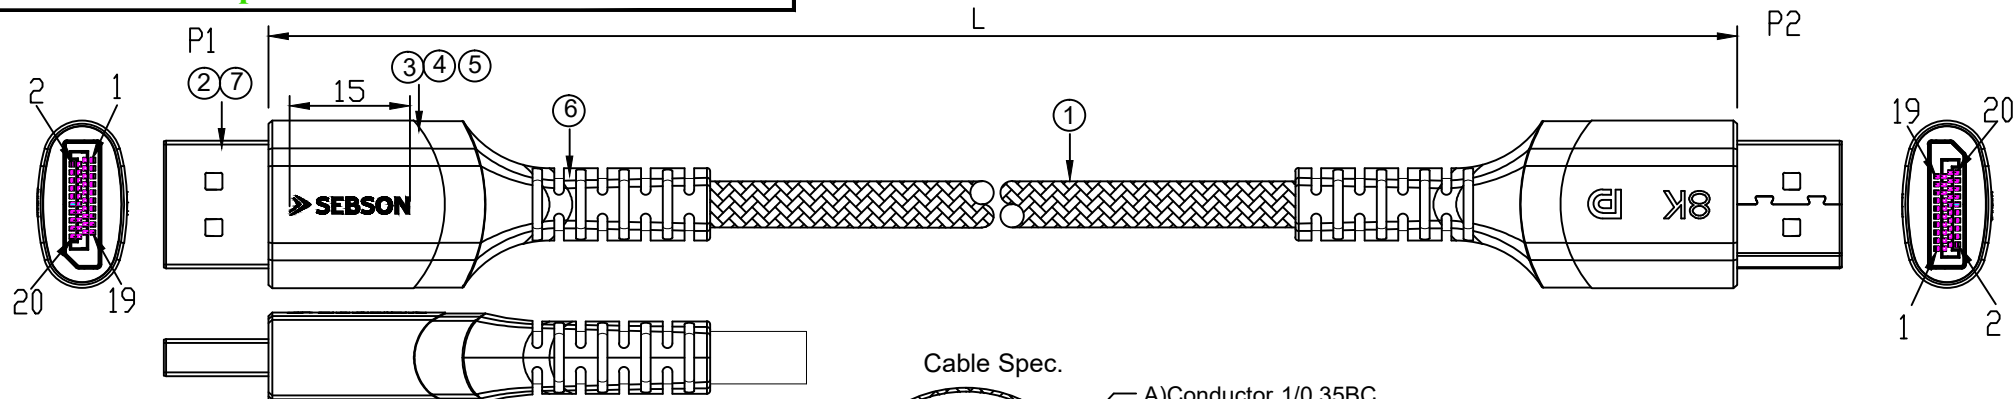


Cable Spec.

- A) Conductor 1/0.35BC
- B) Insulation FPE 0.98mm
- C) Drain wire 1/0.254BC
- D) Insulation PE 0.6mm
- E) Al Foil
- F) Mylar
- G) Conductor 1/0.254BC
- H) Insulation PE 0.6mm
- I) Drain wire 1/0.254BC
- J) Al Foil
- K) Braiding 16/8/0.12AL
- L) Jacket OD: 6.7±0.15mm Black
- M) Black/White Cotton Sleeve

- 100% Open/Short Test
- Conductive Resistance: 5ohms MAX
- Insulation Resistance: 10M ohm MIN.
- HI-POT: DC 300V/10MS.
- The product is RoHS compliant.
- Support 8K@60Hz.

Item NO.	Length(m)	Remarks
DP_2M_A	2.0m	1PK
2_X_DP_2M_A	2.0m	2PK
DP_3M_A	3.0m	1PK
2_X_DP_3M_A	3.0m	2PK
DP_5M_A	5.0m	1PK

⑦	Caps	HDMI Protective Cap, PE	2PCS	
⑥	SR	45P PVC, Black	2PCS	
⑤	Shell	Gun Black Al shell	2PCS	
④	Internal Mold	Inner Mould PE	2PCS	
③	Cable clip	Cable clip, 28AWG, Black, spec: 15.5*5.52*3.2mm	2PCS	
②	Connector	DP male w/o hook, Gold-Plated	2PCS	
①	Cable	DP1.4V 28AWG(1/0.35BC x 1P + D1/0.254BC + AL-Foil + HM-Mylar) x 5P + 1/0.254BC x 4C + F + AL-foil + D1/0.254BC + 128/0.12AL, OD=6.7 Black Soft PVC, Cotton sleeve		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



TOLERANCES UNLESS OTHERWISE STATED

X. = ±1
X = ±0.2
XX = ±0.1



SEBSON

**SEBSON address: Gernotstrasse 17
44319 Dortmund Germany**

ERP NO.:		SAMPLE DWG NO.:	
ZG No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	DP Male to DP Male, Al-Shell		PAGE NO 1/1
APPROVAL		CHECKED	
		DRAWN	
		DATE	2021/05/21