
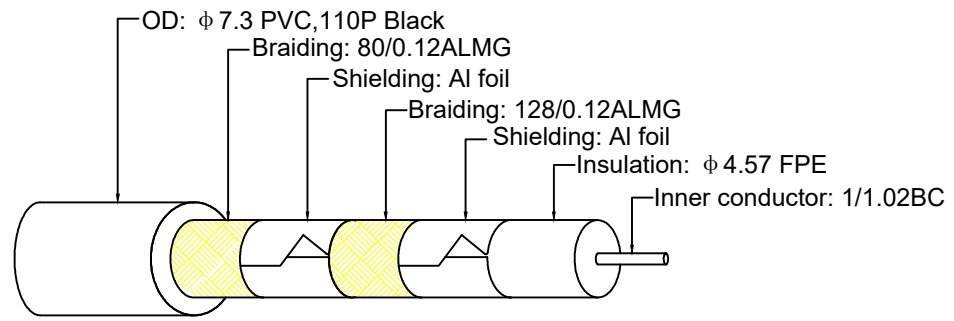


! THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF **SEBSON** AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF **SEBSON**
RoHS Compliant

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2020/09/14	

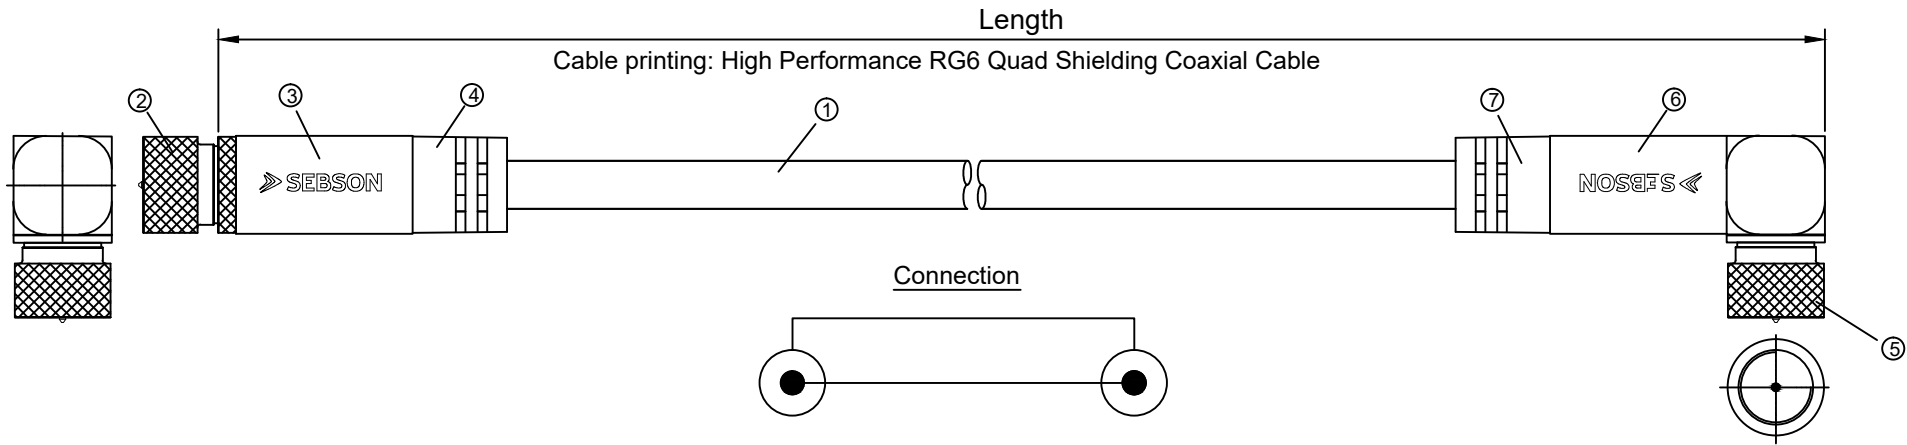

HQ RG6 Coaxial cable

- Technical requirements:
- Characteristic impedance: 75±3 Ohm(@200MHz)
 - Reflect:

1006-2400MHz	≥18dB
--------------	-------

	Item NO.	Length(m)
	SAT_2M_B	2.0m
	SAT_5M_B	5.0m
	SAT_10M_B	10.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑦	External Mold	Angled F Male External Mould,Black	1PC
⑥	Shell	Angled F Male Metal shell, Al Shell, Gun Black	1PC
⑤	Connector	Angled F Male, Gold plated	1PC
④	External Mold	F Male External Mould,Black	1PC
③	Shell	F Male Metal shell, Al Shell, Gun Black	1PC
②	Connector	F Male, Gold plated	1PC
①	Cable	HQ RG6 Quad shielding 105dB Cable 1.02BC+4.57FPE+AL+128/0.12ALMY+AL +80/0.12ALMG+OD:7.3mm Black, 110P	

TOLERANCES UNLESS OTHERWISE STATED
 X. = ±1
 .X = ±0.2
 .XX = ±0.1

SEBSON SEBSON address: Gernotstrasse 17
44319 Dortmund Germany

ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	F Male to Angled F Male, SAT cable Gold plated	PAGE NO	1/1
APPROVAL		DATE	2020/09/14
CHECKED		DRAWN	