




THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF **SEBSON** AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF **SEBSON**

RoHS Compliant a

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/11/06	

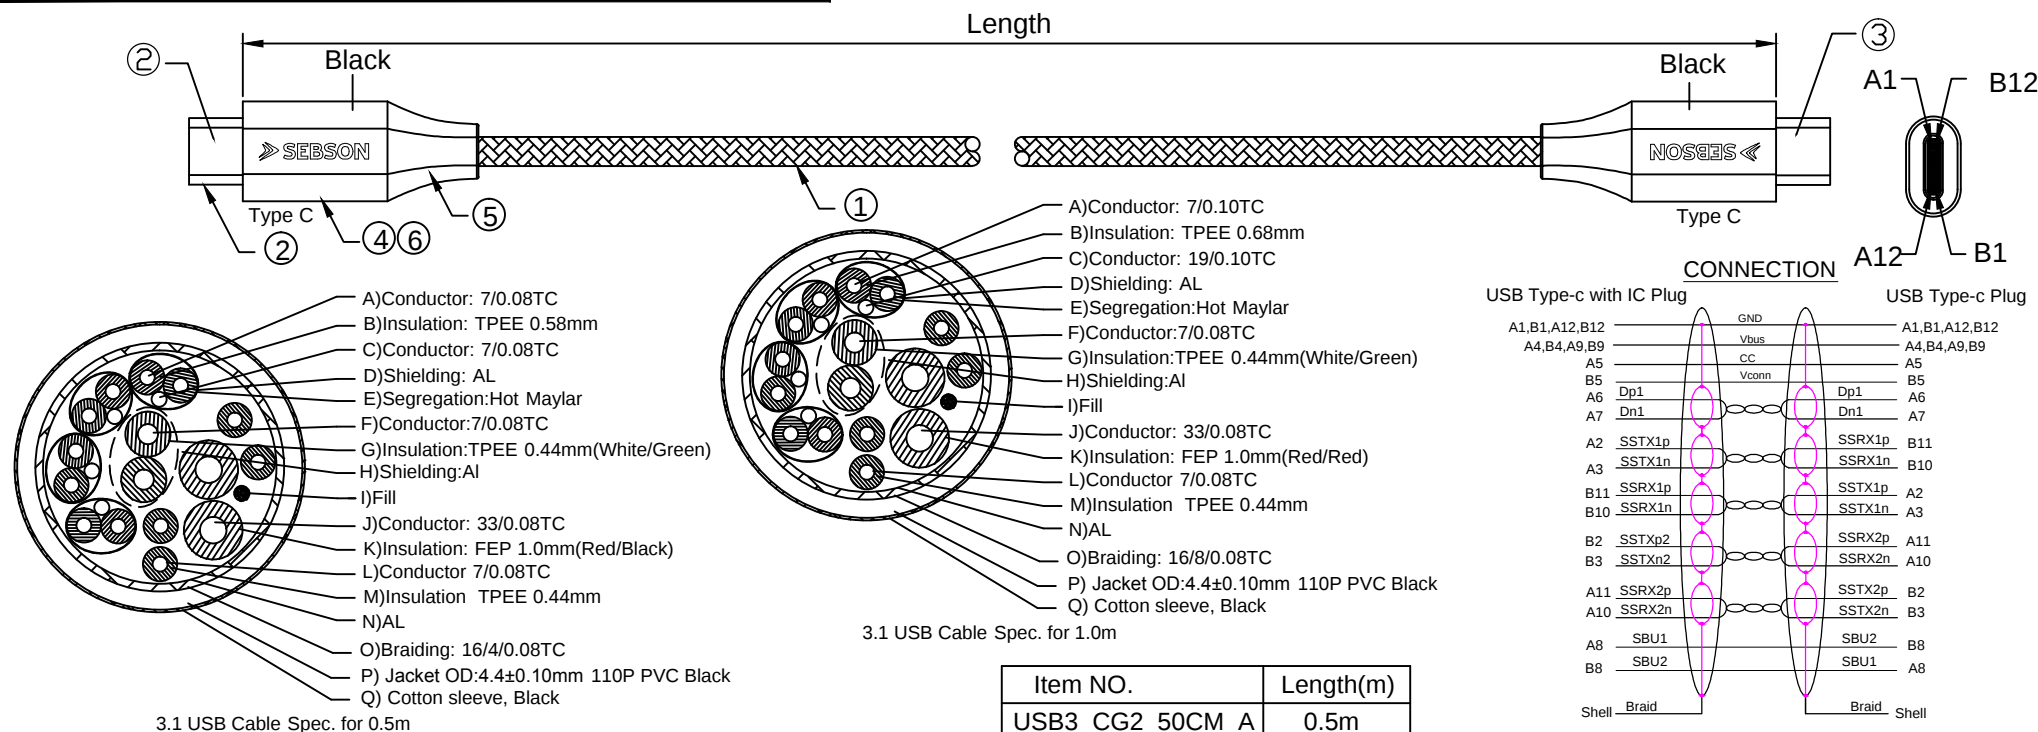


Item NO.	Length(m)
USB3_CG2_50CM_A	0.5m
USB3_CG2_1M_A	1.0m

Remark:

- 1.100% Open/Short Test
2. Conductive Resistance: 5ohms MAX
3. Insulation Resistance: 5M ohm MIN.
4. The product is Reach/RoHS compliant.
5. With Emark Chipset.
6. Support 3.1 Gen2(10G/5A).

⑦	Cable tie	Cable tie, Black		
⑥	Shell	Al Shell, Black, "SEBSON" logo	2PCS	
⑤	External Mold	Outer Mould 25P PVC, Black	2PCS	
④	Internal Mold	Inner Mould, PE	2PCS	
③	Connector	USB Type C, PCBA, Gold-plated	1PC	
②	Connector	USB Type C, PCBA(W/ E-Marker), Gold-plated	1PC	
①	Cable-2	[(7/0.10TC+0.68TPEE)*1P+D(19/0.10)+AL+Mylar]*4P+ [7/0.08TC+0.44TPEE(White/Green)]*1P + [33/0.08TC+0.88FEP(Red/Red)]*2C +[(7/0.08TC+0.44TPEE)]*4P+ Fill+AL+16/8/0.08TC+110P PVC OD4.4mm + Cotton Sleeve	1.0m	
	Cable-1	[(7/0.08TC+0.58TPEE)*1P+D(7/0.08)+AL+Mylar]*4P+ [7/0.08TC+0.44TPEE(White/Green)]*1P + [33/0.08TC+0.88FEP(Red/Black)]*2C +[(7/0.08TC+0.44TPEE)]*4P+ Fill+AL+16/4/0.08TC+110P PVC OD4.4mm + Cotton Sleeve	0.5m	
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



SEBSON

**SEBSON address: Gernotstrasse 17
44319 Dortmund Germany**

ERP NO.:		SAMPLE DWG NO.:	
ZG NO.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	USB 3.1 (Gen2) Type C male to Type C male	PAGE NO	1/1
APPROVAL		DATE	2019/11/06
CHECKED		DRAWN	