

CPP DRY SHUT

Introducing Dry-Shut from CPP



The Dry-Shut from CPP is a precision moulded minimum spill coupling. On disconnection the poppets automatic close and shut off the liquid flow, resulting in minimal residual loss or air inclusion. This simple ISO "B" type operation makes it easy to handle with no levers or switches to operate. Our Dry-Shut couplings are ISO 7241-1 series B (ISO-B) interchangeable.

ID	Product Description
1	Glass polypropylene male body
2	Precision moulded poppet
3	VITON® main seal
4	Glass polypropylene female body
5	Contoured moulded sleeve
6	Exclusive locking bean design
7	VITON® poppet seal
8	316 stainless steel springs

VITON® (registered trademark of DuPont Performance Elastomers L.L.C.)
other seals available

Tech Spec:

Working Pressure: 100 psi (7bar)
Flow rate: 168 L/min (45 USG/pm)
Compatible: ISO 7241-1 (ISO B)

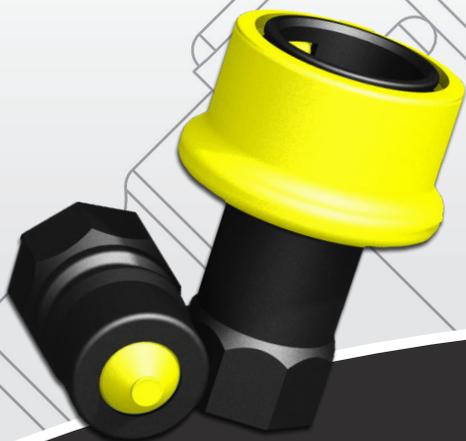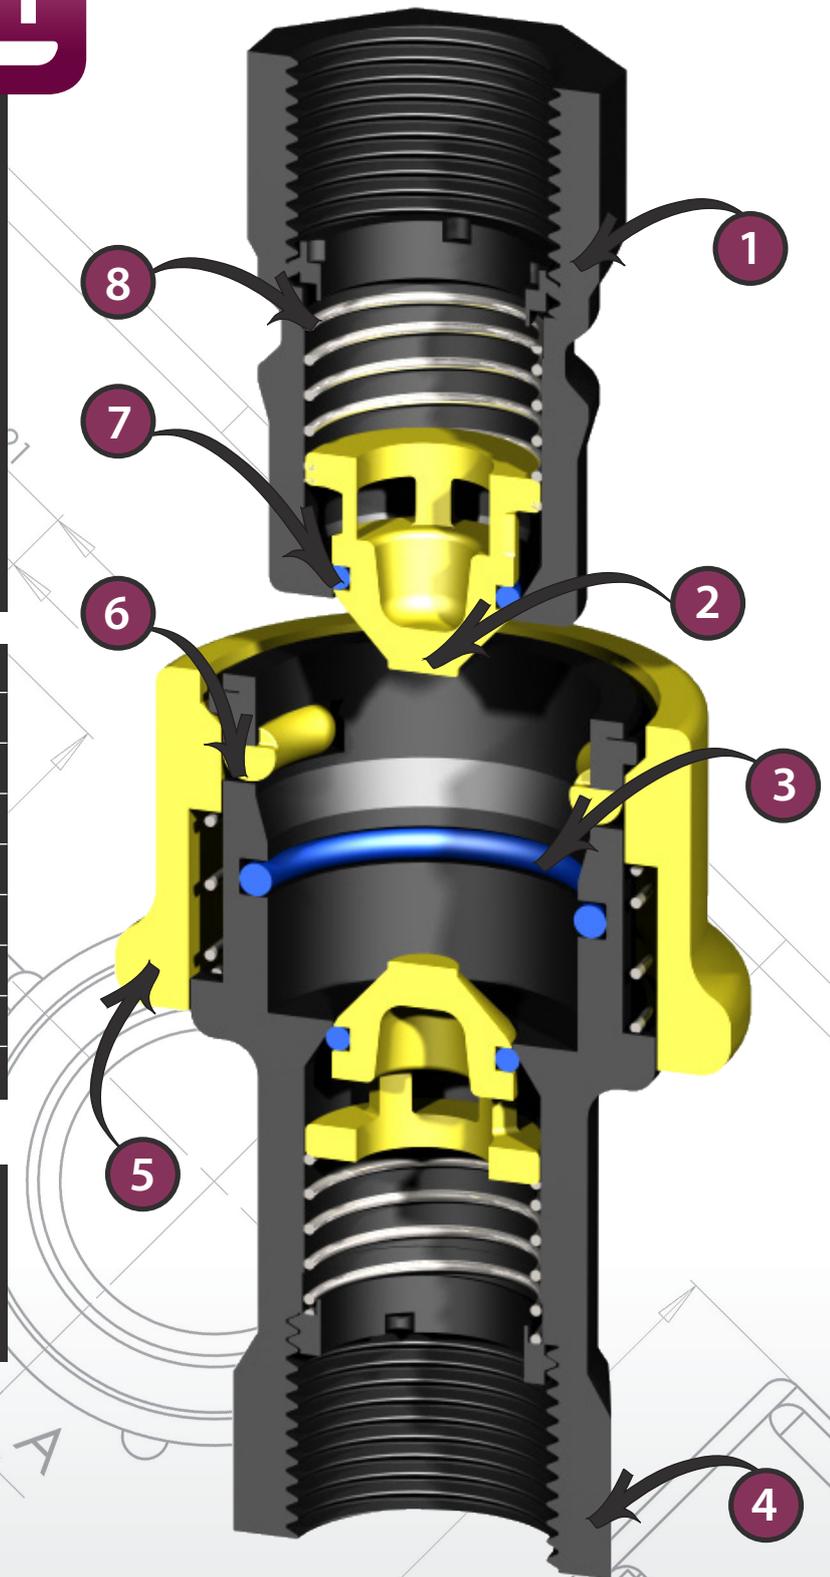

CPP

www.dry-shut.com

www.cpp-lm.com

UK: +44-1322-551940 — USA: +1-863-638-6335
Unit 38 Crayford ind. Est. / Swaisland Drive / Crayford / Kent / DA1 4HS / United Kingdom



1

2

3

4

5

6

ID	Product Number	Product Description
1	DS10BFVF/10B/V027	1" Dry-Shut valved female coupler X 1" BSP female G/P/P
2	DS10BMVF/10B/V027	1" Dry-Shut valved male adapter X 1" BSP female G/P/P
3	DS10BMVF/20CC/V027-2	1" Dry-Shut valved male adapter X 2" Part B Camlock coupler
4	DS10BMVF/20M/V027-2	1" Dry-Shut valved male adapter X 2" NPS female Easy-Seal
5	DS10BMVF/60UD/V027-2	1" Dry-Shut valved male adapter with S60X6 (2") female
6	DS10BMVF/20B/V027-2	1" Dry-Shut valved male adapter to 2" pipe thread male



1

2

3

4

5

6



7

8

9

10

11

12

ID	Product Number	Product Description
1	HMFB/10BP20M/027	1" Part 'HAS', 1" BSP Short male/o-ring x 2" NPS female
2	HMFB/10BP60UD/027	1" Part 'HAS', 1" BSP Short male/o-ring x S60X6 female buttress
3	HFFM/32U/027	2" NPS female X S100X8 buttress female, G/P/P C/W seal
4	HMPB/10T/027	1" BSP short male / o-ring X 1" (25mm) hose tail G/P/P
5	HMPB/10B075T/027	1" BSP short male / o-ring X 3/4" (19mm) hose tail G/P/P
6	HMPB/10B05T/027	1" BSP short male / o-ring X 1/2" (13mm) hose tail G/P/P
7	CMF/1010PB/027	1" Part 'FS', 1" Camlock adaptor x 1" BSP short male / o-ring
8	HMF PB/10075B/027	1" BSP short male / o-ring X 3/4" BSP female G/P/P
9	HMMPB/10075B/027	1" BSP short male / o-ring X 1" BSPT male G/P/P
10	HMMPB/10075B/027	1" BSP short male / o-ring X 3/4" BSPT male G/P/P
11	HMMPB/1005B/027	1" BSP short male / o-ring X 1/2" BSPT male G/P/P
12	PFMB/10B90/024	1" BSP female X 1" BSP male 90° street elbow, P/P